



ADDERVIEW RackDrawer

Rack mounted TFT, keyboard and mouse console with Samsung® TFT technology, for local control of KVM switches and attached computers.

The **AdderView RackDrawer** is a rackmountable keyboard, monitor and mouse console that provides data centre managers with local control of computers attached to a KVM switch. It neatly folds and slides away into 1U of rack space, providing a neat and space saving solution. A selection of international keyboard layouts is available and provides both USB and PS/2 keyboard and mouse output.

FEATURES

Samsung® TFT technology

The use of Samsung® TFT technology delivers high contrast, crisp text, and lightning fast response time.

Multiplatform control

The AdderView Rack Drawer can be used to control PC's and KVM switches with either USB or PS/2 console interfaces. When used with AdderView Matrix or Matrix MP KVM switches the AdderView Rack Drawer combines to provide a fully integrated multi platform control solution.

Choice of keyboards language

The AdderView Rack Drawer is available in a selection of international keyboard layouts including English (UK), English (US), German, Swedish, French, Italian, Spanish, Danish, Belgian and Swiss.

Choice of keyboard layout


Available with PC or Sun layout with an integrated or additional NumBlock.

Keyboard and mouse

Laptop keyboard with sponge rubber hand support. Innovative mouse touchpad with integrated right 'mouse click' function, right and left mouse buttons.

Telescopic slide

One size fits all slides (485 - 850MM) with chassis interlocking rails and snap lock catches for safety during use.

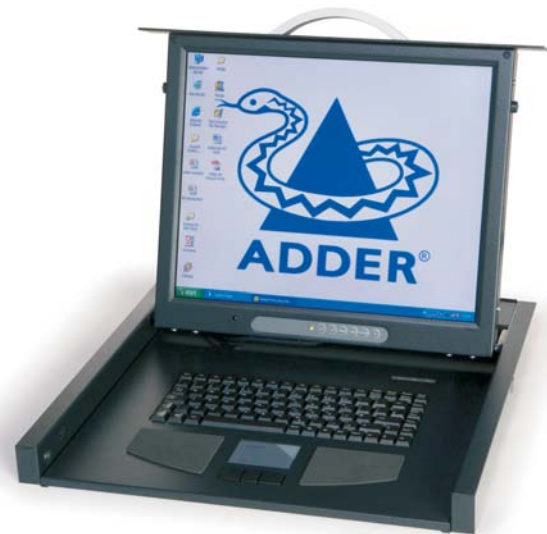

ADDERVIEW RackDrawer



Rack mounted TFT, keyboard and mouse console with Samsung® TFT technology, for local control of KVM switches and attached computers.

TECHNICAL SPECIFICATIONS

Display	17" TFT Display, Samsung® Smart Panel 25 ms response time 16.7 million colours 270 cd/m ² brightness 500:1 contrast ratio 1280 x 1024 (SXGA) 60Hz On-screen menu
Connections	Video - HDD15 Keyboard/Mouse - MiniDin6/USB Type B
Physical design	1U compact case, robust metal construction W 483mm, H 44mm, D 430mm Weight 10.5Kgs
Power supply	100-240VAC 47/63Hz
Operating temperature	0°C to 50° / 32°F to 122°F
Approvals	CE, FCC

Local, Remote and Global KVM Control



ADDER CORPORATION
29 Water Street, Newburyport, MA 01950 USA
Tel: +1 888 932 3337 Fax: +1 888 275 1117
email: usasales@adders.com www.adders.com

ADDER TECHNOLOGY LIMITED
Technology House, Trafalgar Way, Bar Hill, Cambridge, CB3 8SQ UK
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081
email: sales@adders.com www.adders.com